

VANTAGETM

ROBERTS / GORDON[®]

Premium Quality Unitary Heater



**MODEL
CTH2V**

Long-Lasting Durability for Industrial/Commercial Applications

- Diagnostic capability incorporated in burner design
- Design flexibility achieved with straight, U-tube or L configurations and a broad range of burner sizes and tube lengths
- Years of field-proven product performance
- Burner box design with protective enclosure for controls helps minimize exposure to dirt and moisture from combustion air
- Longer life provided by durable components




800.828.7450

www.robertsgordon.com

THE INDUSTRY LEADER
RADIANT
EFFICIENCYTM

ROBERTS GORDON® THE EXCLUSIVE PRODUCER OF CORAYVAC™

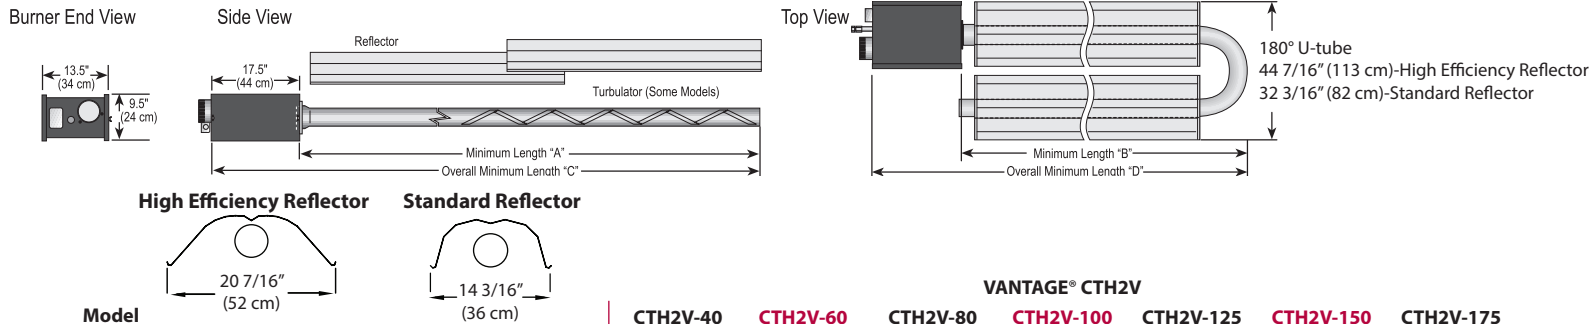

		VANTAGE® CTH2V						
Model		CTH2V-40	CTH2V-60	CTH2V-80	CTH2V-100	CTH2V-125	CTH2V-150	CTH2V-175
Minimum Length of Straight Tube*	[ft] A	10	20	20	30	40	50	60
Minimum Length of U-tube*	[ft, in] B	N/A	11.7	11.7	16.7	21.7	26.7	31.7
Overall Minimum Length of Straight Tube	[ft, in] C	11, 5.5	21, 5.5	21, 5.5	31, 5.5	41, 5.5	51, 5.5	61, 5.5
Overall Minimum Length of U-tube	[ft, in] D	N/A	13, 0.5	13, 0.5	18, 0.5	23, 0.5	28, 0.5	33, 0.5
*For additional lengths, please see the current Installation, Operation and Service Manual.								
Input (Btu/h) x (1000)		40	60	80	100	125	150	175
Inlet Pressure	[in wc] NG min.	4.6	4.6	4.6	4.6	4.6	4.6	5
	LPG Propane min.	11	11	11	11	11	11	11
	NG & LPG Propane max.	14	14	14	14	14	14	14
Gas Connection	NPT	½"	½"	½"	½"	½"	¾"	¾"
Exhaust Flue	dia	4"	4"	4"	4"	4"	4"	4"
Combustion Air Inlet	dia	4"	4"	4"	4"	4"	4"	4"
Weights								
Hot Rolled or Aluminized Tube and Accessory Packages [ft]		10	20	30	40	50	60	70
Standard Aluminum Reflector	[lb]	52	86	120	161	206	240	281
High Efficiency Aluminium Reflector	[lb]	54	89	124	167	213	248	291
Burner	[lb]	40						
U-tube Packages								
Aluminized U-tube for Standard Reflector	[lb]	19						
Aluminized U-tube for High Efficiency Reflector	[lb]	23						

Fuel	NG or LPG Propane
Electrical Supply	120 V, 60 Hz, 1 A
Heat Exchanger Tubing	10 ft Sections, 4" dia, 16 Gauge, First 10 ft ALUMI-THERM® Steel Tubing [Remaining Hot Rolled or Heat Treated Aluminized Steel Tubing]
Exhaust Flue	dia 4"
Reflector and End Caps	.024 Aluminum [Optional - .024 Stainless Steel Type 304]
Control System	Fully Automatic, Three-Try, 100% Shut-Off, Direct Spark Electronic Ignition Control, LED Burner Status Light
Approved As	Indoor (Vented or Unvented)
Certification	ANSI Z83.20/CSA 2.34, 2.17
Warranty	Three-Year Limited (Refer to Installation, Operation and Service Manual for Details)

Clearances to Combustibles **[in]

Model		CTH2V-40		CTH2V-60		CTH2V-80		CTH2V-100		CTH2V-125		CTH2V-150		CTH2V-175	
Horizontal	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°	Horiz.	45°
	A	6	8	6	8	6	8	6	10	6	10	6	12	8	12
	B	27	8	35	8	38	8	40	8	46	8	50	8	52	8
	C	53	51	63	60	66	66	71	74	77	78	80	84	82	85
	D	27	46	35	54	38	60	40	64	46	69	50	74	52	79

**Clearances B, C and D can be reduced by 50% for locations 25 ft (7 m) or more downstream of the burner. For other mounting options and associated clearances, complete installation, operation and service criteria, please see the current issue of the Installation, Operation and Service Manual.

This product is not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgment.

Roberts-Gordon LLC
1250 William Street
P.O. Box 44
Buffalo, NY 14240-0044 USA
Telephone: +1.716.852.4400
Fax: +1.716.852.0854
Toll Free: 800.828.7450
www.robertsgordon.com

© 2017 Roberts-Gordon LLC All rights reserved. No part of this work covered by the copyrights herein may be reproduced or copied in any form or by any means – graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems – without written permission of Roberts-Gordon LLC.

Printed in U.S.A.

CTH2VSN4

1217 Rev B

